




Solar Charging

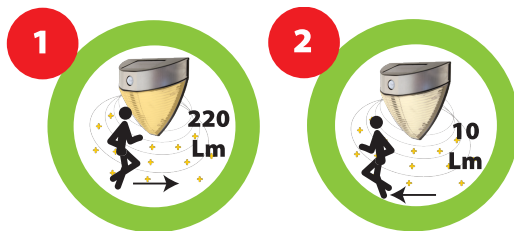

ARMOUR

Applique LED a carica solare con rilevatore di movimento
Solar motion welcome light
Applique solaire LED avec détecteur de mouvements
Aplica solar LED con detector de movimientos
LED-Solarwandlampe mit Bewegungsmelder:



SL235



PACKING	INNER	MASTER
/	pcs	pcs
Colour box	6	12



DATI TECNICI / SPECIFICATION / CARACTÉRISTIQUES / CARACTERISTICAS / SPEZIFIKATIONEN

Codice / Item / Code / Código / Code	SL235
Nome prodotto / product name / Nom du produit / Designación / Produktname	ARMOUR
Alimentazione / Power supply / Alimentation / Alimentación / Stromversorgung	Monocrystalline solar panel: 5,5V 110mA
Batteria / Battery / Batterie / Batería / Batterie	3x AA Ni-MH 600mAh (included)
Tempo di ricarica / Charging Time / Temps de recharge / Tiempo de carga / Ladezeit	8 hrs
Autonomia / Runtime / Autonomie / Autonomía / Leuchtdauer	6 hrs (continuous use)
Tecnologia della Luce / Light technology / Technologie de la lumière / Tecnología de iluminación / Leuchtentechnologie	3 SMD LED
Potenza d'illuminazione (W) / (W) Power / Puissance (W) / Potencia (W) / Leuchtstärke (W)	2,2W
Consumo elettrico (W) / (W) Consumption / Consommation (W) / Consumo (W) / Verbrauch (W)	2,2W
Lumen / Lumen / Lumen / Lumen / Lumen	220 Lm
Tipo di luce / Kelvin degrees / Degrés Kelvin / Temperatura de luz / Grad Kelvin	6000K
IRC / Colour rendering Index / Indice de rendu des couleurs / IRC / Farbwiedergabeindex	-
Fascio di luce / Light beam / Type de faisceau / Tipo de haz / Lichtstrahl	Diffuse Light
Portata / Range / Distance d'éclairage / Alcance alumbrado / Leuchtweite	15.000 hrs
Durata di vita del LED / LED Life time / Durée de vie des LED / Durada de vida del LED / Lebensdauer LED	-
Massima intensità del fascio / Peak beam intensity / Intensité maximale du faisceau / Máxima intensidad / Abstrahlintensität	-
Dimmerabilità / Dimmable / Dimmable / Dimmer, regulador / Dimmereigenschaften	-
Numero di cicli on-off / On off cycles / Nr de cycles on-off / Numero de On-OFF / Ein-Aus Zyklen	-
Power factor / Power factor / Power factor / Power factor / Leistungsfaktor	-
Cavo / Cable / Câble / Cable / Kabel	
Materiale / Material / Materiau / Material / Material	Plastic + Steel
Grado di protezione / Protection degree / Degré de protection / Estanqueidad / Schutzgrad	IP44
Resistenza Meccanica / Mechanical resistance / Résistance Mécanique / Resistencia mecanica / Mechanische Widerstandsfähigkeit	
Accessori inclusi / Accessories included / Accessoires fournis / Accesorios incluidos / Zubehör enthalten	2 screws
Funzioni / Functions / Fonctions / Función / Funktionen	
Dimensioni prodotto / Product dimensions / Dimensions du produit / Dimensiones producto / Abmessungen Produkt	Width x Height x Length: 205 x 200 x 95 mm
Dimensioni prodotto imballato / Packed dimensions / Dimensions du produit emballé / Dimensiones embalaje / Abmessungen Umverpackung	Width x Height x Length: 230 x 120 x 225
Peso netto / Net Weight / Poids net / Peso neto / Gewicht netto	430 g
Peso prodotto imballato / Weight of packaged product / Poids du produit emballé / Peso producto con embalaje / Gewicht mit Umverpackung	590 g